

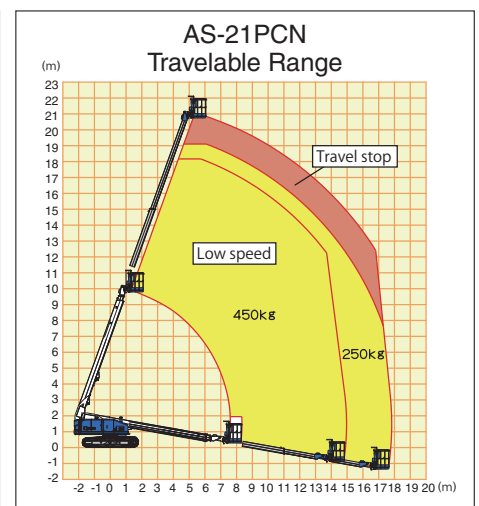


→ AS-21PC/AS-21PCN (NUS21-7/NUS21N-7)

Crawler type
Telescopic boom lift


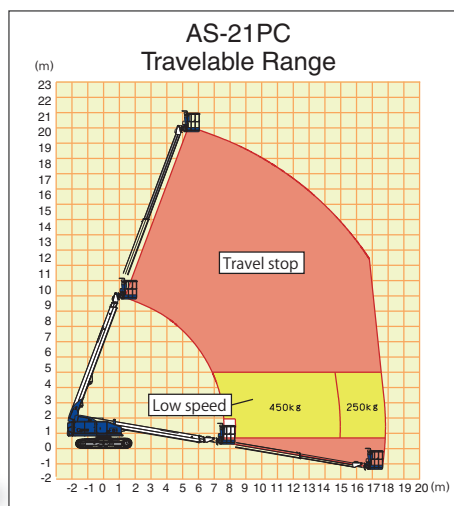


TYPE	AS-21PC/AS-21PCN
Platform capacity	250 kg / 450 kg
Allowable tilt	5°
Platform dimensions (W x L x H)	1,130 x 730 x 1,000 mm
Platform height (max)	20,870 mm
Horizontal reach	17,805 mm
Machine weight (w/pad)	16,750 (17,170) kg
Overall length	10,650 mm
Overall width	2,480 mm
Overall height	2,190 mm
Engine model	KUBOTA V2607
Travel speeds	1.0/1.4/2.5 km/h

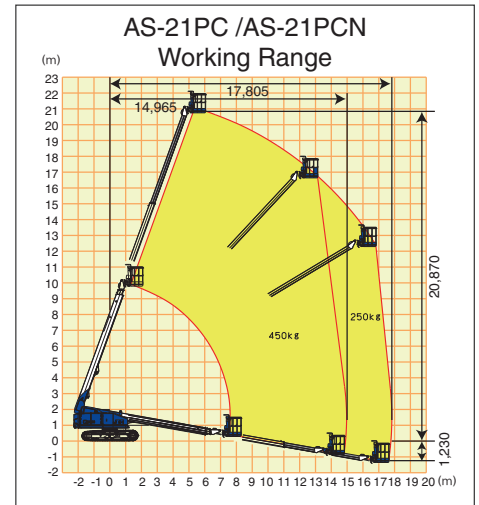

Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

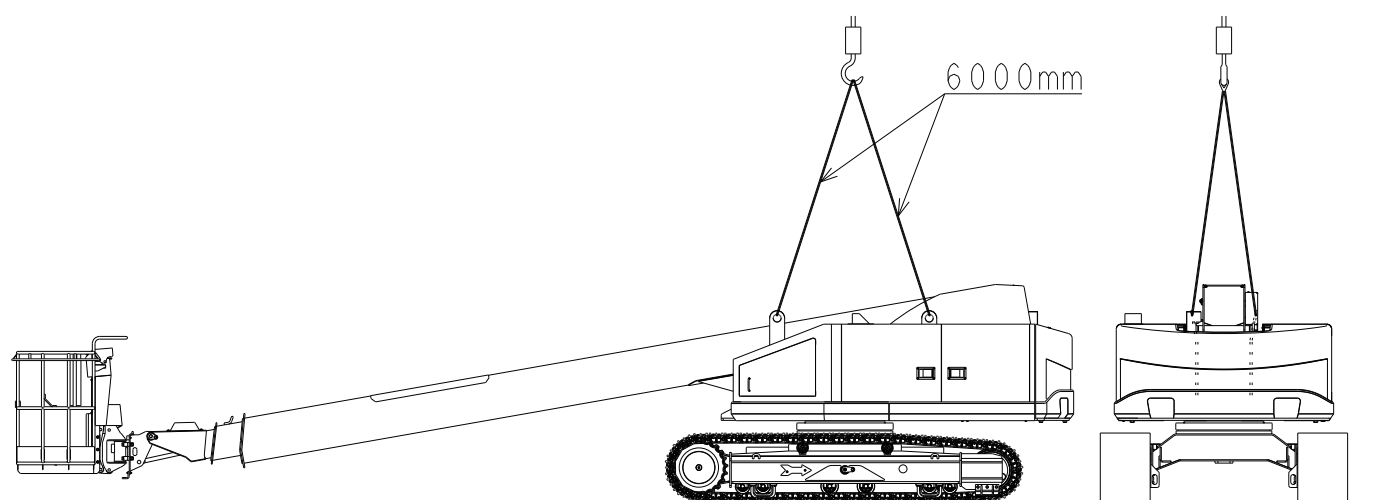

Tadano Ltd.

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan

Phone: +81-3-6811-7309

info@tadano.com

www.tadano.com